

TDM-P190SH5TAGF-RND2

19" Defense Monitor, 1600nits, IP65 Aluminum
Front Bezel, Mosmite Film, AG, VGA/DP/HDMI,
9~36VDC, MIL-STD-461G/1275E Compliance



Features

- ▶ 19" 1280*1024 LCD
- ▶ Optical Bonding by Mosmite Film
- ▶ RackMount with Handles
- ▶ IP65 Front Side
- ▶ 1500 nits LED backlight
- ▶ P-Cap touch with Anti-Glare
- ▶ All IOs by D38999 Connector
- ▶ DC 9~36V Power Input with 90W power adapter
- ▶ MIL-STD-461G/1275E Compliance
- ▶ -40~70°C Operating Temp

I/O Connect

External I/O Port	HDMI by D38999 Connector (with 1.5 meter external cable) USB (Touch) by D38999 Connector (with 1.5 meter external cable) Power Input by MS3114E8 Connector
-------------------	--

LCD

Max. Resolution	1280*1024
Contrast Ratio	1000 : 1
Max. Color	16.7M
Luminance	1600 nits
View Angle	85/85/80/80

Power Requirement

Power Input	9~36VDC with MIL-STD-461G/1275E Compliance
-------------	---

Touch Screen

Type	P-cap USB
------	-----------

Environment


Operating Temp	-40~70 °C , IEC-60068-2-1/2/14
Storage Temp	-40~70 °C
Humidity	10~90% @40 °C, non-condensing
EMC	MIL-STD-1275E Compliance MIL-STD-461G Compliance For CE101/102, RE101/102 FCC / CE Class A Certification
Vibration	MIL-STD-810H, Method 514.8, Procedure I, 5~500Hz Certification
Shock	MIL-STD-810H, Method 516.8, Procedure I, 20g 11ms Certification

Mechanical

Construction	Aluminum Bezel and Metal case
IP Rating	IP65 Front Side
Mounting	Wall Mount , VESA Mount
Dimension	TBC

* All specifications are subject to change without prior notice.

Dimension & I/O Connector

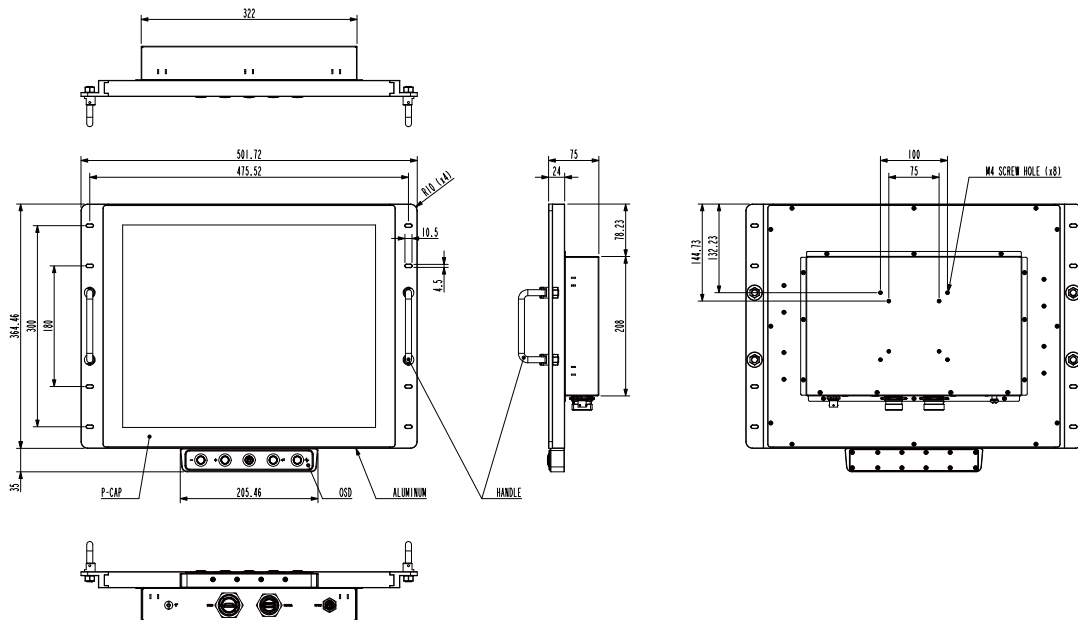

Ordering Information

TDM-P190SH5TAGF-RND2

19" Defense Monitor, 1600nits, IP65 Aluminum Front Bezel, Mosmite Film, AG, VGA/DP/HDMI, 9~36VDC, MIL-STD-461G/1275E Compliance