

# Nuvo-9100VTC Series

Intel® 14th/ 13th/ 12th-Gen Core™ in-vehicle controller with 4x M12/ 4x RJ45 / 8x RJ45 PoE+ ports

## Key Features



- Supports Intel® 14th/ 13th/ 12th-Gen Core™ 24C/ 32T 35W/ 65W CPU
- 4x or 8x 802.3at PoE+ ports via M12 or RJ45 connectors
- 1x USB 3.2 Gen2x2 type-C and 8x USB 3.2/ 2.0 type-A ports
- On-board isolated CAN bus for in-vehicle communication
- 4-CH isolated DI and 4-CH isolated DO
- M.2 Gen4 x4 NVMe SSD slot
- 8V to 48V wide-range DC input with built-in ignition power control
- 2x SATA ports with 1x hot-swappable HDD tray, supporting RAID 0/1
- E-Mark/ EN 45545 certified and EN 50155 EMC compliant



CONTACT US

GET QUOTE

## Introduction

Nuvo-9100VTC is Neousys' latest rugged in-vehicle controller based on Intel® 14th/ 13th/ 12th-Gen Core™ processors. Benefiting from cutting-edge Intel® 7 photolithography, the latest Core™ desktop processors come with up to 24 cores/ 32 threads, offering an incredible boost of computational performance. Combining DDR5 memory bandwidth throughput and PCIe Gen4 NVMe high-speed disk read/write, users can expect an overall system performance improvement of up to 1.8x when compared to previous 10th or 11th-Gen platforms.

Nuvo-9100VTC provides flexibility to support a range of peripherals and connections. It has 2.5Gb and 1Gb Ethernet ports, and four or eight 802.3at PoE+ ports to supply 25W of power to connected devices such as IP cameras. The system also has x-coded M12 connectors and screw-lock mechanisms on the computer I/Os like Gigabit Ethernet, USB 3.2 Gen1 and USB 3.2 Gen2 to guarantee extreme rugged connectivity in shock/ vibration environments. Wireless connectivity is essential for modern-day in-vehicle applications, and you can simultaneously utilize two M.2 and three mini PCIe sockets with corresponding wireless modules for 5G/ 4G, WiFi, GPS, and CAN module for communication.

On top of all that, Nuvo-9100VTC also features an isolated CAN bus for in-vehicle communication, isolated DIO for sensor/ actuator control, 8V to 48V wide-range DC input with ignition power control, and is E-Mark/ EN 45545 certified and EN 50155 EMC compliant, making it the perfect solution with extraordinary reliability for various in-vehicle applications.


## Specifications

System Core		Storage Interface			
Processor	Supporting Intel® 14th-Gen Core™ CPU (LGA1700 socket, 65W/ 35W TDP) <ul style="list-style-type: none"> <li>- Intel® Core™ i9-14900/ i9-14900T</li> <li>- Intel® Core™ i7-14700/ i7-14700T</li> <li>- Intel® Core™ i5-14500/ i5-14400/ i5-14500T</li> <li>- Intel® Core™ i3-14100/ i3-14100T</li> </ul>	M.2	1x M.2 2280 M key socket (PCIe Gen4 x4) for NVMe SSD		
		SATA HDD	1x hot-swappable 2.5" HDD tray (7mm HDD/ SSD) and 1x internal 2.5" SATA ports		
Expansion Bus		Expansion Bus			
Processor	Supporting Intel® 13th-Gen Core™ CPU (LGA1700 socket, 65W/ 35W TDP) <ul style="list-style-type: none"> <li>- Intel® Core™ i9-13900E/ i9-13900TE</li> <li>- Intel® Core™ i7-13700E/ i7-13700TE</li> <li>- Intel® Core™ i5-13500E/ i5-13400E/ i5-13500TE</li> <li>- Intel® Core™ i3-13100E/ i3-13100TE</li> </ul>	Mini PCI Express	1x full-size mini PCIe socket 2x full-size mini PCIe sockets (USB signals only) with internal SIM sockets		
		M.2	1x M.2 2242/3052 B key socket with SIM slot for M.2 5G/ 4G module 1x M.2 2242/3052 B key socket with SIM slot for M.2 4G module		
Power Supply		Power Supply			
Processor	DC Input	DC Input			
		1x 3-pin pluggable terminal block for 8V to 48V DC input (IGN/ GND/ V+)			
Processor	Ignition Control	Ignition Control			
		Built-in ignition power control			
Processor	Remote Ctrl. & LED Output	Remote Ctrl. & LED Output			
		1x 3-pin pluggable terminal block for remote control and PWR LED output			
Mechanical		Mechanical			
Processor	Dimension	Dimension			
		240 mm (W) x 225 mm (D) x 84 mm (H)			
Processor	Weight	Weight			
		3.7kg			
Processor	Mounting	Mounting			
		Wall-mount with damping bracket			
Environmental		Environmental			
Processor	Operating Temperature	With 35W CPU -40°C ~ 70°C <sup>[1]</sup> (with 1 memory module installed) -40°C ~ 60°C <sup>[2][3]</sup> (with 2 memory modules installed)			
		With 65W CPU -40°C ~ 50°C <sup>[2][3]</sup> (configured as 65W TDP with 2-slots memory)			
Processor	Storage Temperature	-40°C to 85°C			
		Humidity			
Processor		10% to 90% , non-condensing			
		Vibration			
Processor		EN 50155:2017/ IEC 61373, Category I, Class B - Body mounted			
		Shock			
Processor		EN 50155:2017/ IEC 61373, Category I, Class B - Body mounted			
		EMC			
Processor		E-Mark, EN 50121 (EN 50155 EMC) CE/FCC Class A, according to EN 55032 & EN 55035			
		EN 45545			
<sup>[1]</sup> Due to high heat generation of DDR5 memory, please configure the CPU to 35W mode and utilize only one memory slot, while operating at a temperature of 70°C.					
<sup>[2]</sup> For sub-zero operating temperature, a wide temperature HDD or Solid State Disk (SSD) is required.					
<sup>[3]</sup> For CPU operating at 65W mode, the highest operating temperature shall be limited to 50°C and thermal throttling may occur when sustained full-loading applied. Users can configure CPU power in BIOS to allow higher operating temperature.					

## Appearance



## Dimensions

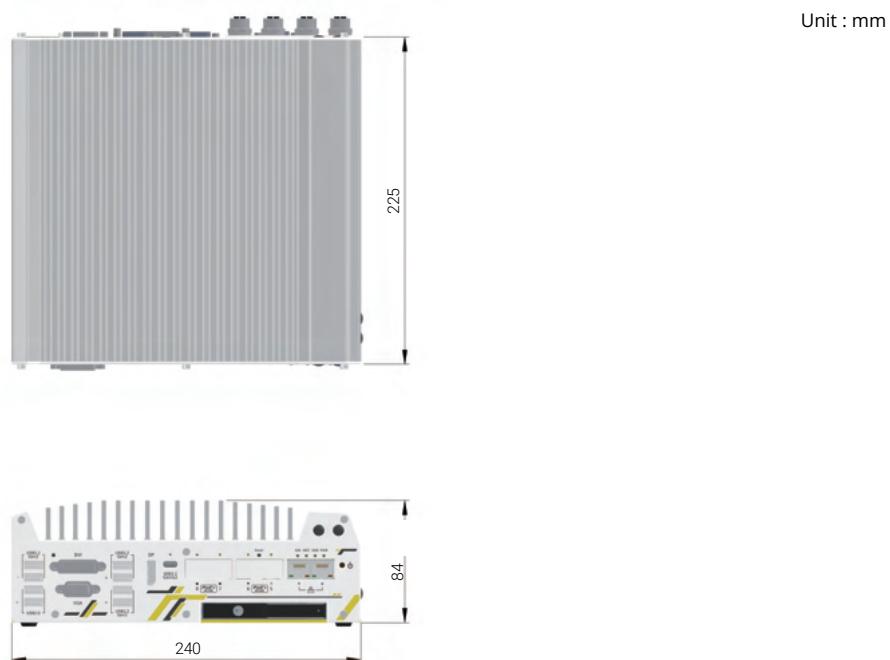

## Ordering Information

Model No.	Product Description
<b>Nuvo-9100VTC</b>	Intel® 14th/ 13th/ 12th-Gen Core™ in-vehicle controller with 4x M12 PoE+ Ports, DIO, CAN bus and RAID
<b>Nuvo-9104VTC</b>	Intel® 14th/ 13th/ 12th-Gen Core™ in-vehicle controller with 4x RJ45 PoE+ Ports, DIO, CAN bus and RAID
<b>Nuvo-9108VTC</b>	Intel® 14th/ 13th/ 12th-Gen Core™ in-vehicle controller with 8x RJ45 PoE+ Ports, DIO, CAN bus and RAID

## Optional Accessories

<b>Cbl-M12X8M-RJ45-CAT5e-500CM</b>	M12 (8-pole-X-coded) to RJ45, CAT5e. Length : 500cm
<b>Cbl-M12X8M-RJ45-CAT5e-1000CM</b>	M12 (8-pole-X-coded) to RJ45, CAT5e. Length : 1000cm
<b>PA-280W-ET3</b>	280W AC-DC power Adapter(GST280A24-YI), 24V 11.67A, 85~264VAC 120~370VDC, C6P Plug, w/ terminal block, -30°C to 70°C