

NET-I-2I380D

Compact Fanless Embedded Computer with Intel® Bay Trail Processor



↳ Nano SIM (Option)

■ Features:

- Intel® Bay Trail E3825 /E3845/J1900 CPU
- On Board DDR3L 2 / 4GB
- Independent display: VGA
- 3 x Intel GbE LAN, 1 x USB 3.0, 3 x USB 2.0, 2 x COM
- 1 x Mini PCIe, 1 x M.2 B Key

■ Specifications :

| | |
|------------------------------|---|
| Motherboard | 2I380D |
| CPU | Intel® Bay Trail E3825/ E3845 /J1900 CPU |
| Chipset | Intel Bay Trail SoC |
| Memory | On Board DDR3L 2 / 4GB |
| Storage | mSATA, 1 x M.2 B Key (SATA) Type 2242 |
| Expansion slots | 1 x Full-size Mini Card (PCIe / mSATA / USB) |
| I/O ports | Network 3 x Intel GbE USB 1 x USB 3.0, 3 x USB 2.0 Serial ports 2 x RS232 / 422 / 485 Display 1 x VGA |
| Optional Modules & Accessory | GPS, Bluetooth, WiFi, 4G LTE, Isolated COM, *VESA Mount Kit, *DIN Rail Mounting Kit *External Power Adapter |
| OS Support | Windows® 10 IOT (64bit), Windows® 8.1 (64bit), Windows® Embedded 8 Standard (64bit), Windows® 7 (32 / 64bit), Windows® Embedded Standard 7 Runtime, Ubuntu 14.10 above, Fedora 25 above, Debian 8 above, CentOS 7.3 above, Mint 18.1 above |

■ Mechanical

| | |
|------------|-------------------------------|
| Dimensions | 106W x 85D x 30H mm |
| Weight | 0.41 kg |
| Mounting | DIN Rail Mount*, VESA Mount * |

■ Power

| | |
|----------|--|
| DC input | +12V~+24V |
| AC input | AC-DC External adapter 100 / 240V (optional) |


■ Environment

| | |
|--------------------------------------|---------------------------|
| Operating Temp. (100 % CPU usage) | -20°C to +60°C with mSATA |
| Storage Temp. | -20°C to +70°C |

■ Certification

CE / FCC class A

■ Dimension

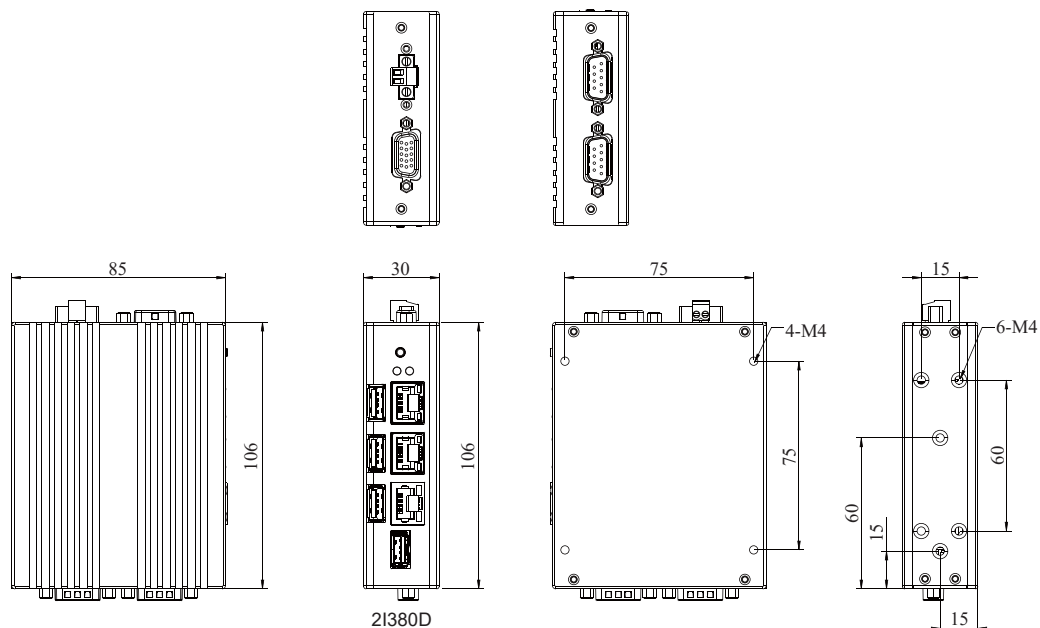

Specification are subject to change without prior notice. ODM / OEM is available.